

EUROPEAN PATENT APPLICATION

⑲ Application number: 89310333.3

⑮ Int. Cl.⁵: **G06K 9/46 , G08B 17/00 , G06F 15/70**

⑳ Date of filing: 10.10.89

⑳ Priority: 12.10.88 GB 8823947
 02.12.88 GB 8828166

④③ Date of publication of application:
 02.05.90 Bulletin 90/18

⑧④ Designated Contracting States:
 AT BE CH DE ES FR GR IT LI LU NL SE

⑦① Applicant: **DETECTOR ELECTRONICS CORPORATION**
 6901 West 110th Street
 Minneapolis Minnesota 55438(US)

⑦② Inventor: **Powell, Brian David**
 22 Loosen Drive
 Maldenhead, Berkshire, SL6 3UR(GB)
 Inventor: **Davidson, Ian**
 Rose Villa
 Lumphanan, Aberdeenshire, AB3 4PX(GB)

⑦④ Representative: **Foster, David Martyn et al**
MATHISEN MACARA & CO. The Coach
 House 6-8 Swakeleys Road
 Ickenham Uxbridge UB10 8BZ(GB)

⑤④ Recognition and processing of wave forms.

⑤⑦ A flame detector has a sensor for producing a digital waveform (8A) representing the flickering flame. Its turning points are detected and the magnitudes 60A, 60B, 60C... between successive such points are measured. The value of each such magnitude is plotted on a graph (8B) whose horizontal axis represents the current value and whose vertical axis represents the immediately preceding value. Points such as E and F are produced lying in regions away from the diagonal B and from the axes. If the detected waveform originates from a regularly varying interfering source, the corresponding points will lie on or near the diagonal B. If the interfering source is a waveform undergoing step changes, the corresponding points will lie adjacent to the axes. In this way, discrimination between flames and interfering sources of radiation can be made.





Fig. 8.



RECOGNITION AND PROCESSING OF WAVEFORMS

The invention relates to the recognition and processing of waveforms. Such waveforms may, for example, be waveforms derived from electromagnetic radiation produced by flames or explosions. Embodiments of the invention to be described have improved discrimination against sources of varying infra-red radiation which might be confused with infra-red radiation emitted by flames.

According to the invention, there is provided apparatus for recognition and classification, comprising a sensor for detecting a parameter of interest and providing an electrical signal representative thereof, calculating means arranged to derive from said signal at least one matrix representing transitions of the signal waveform, and means for comparing the signal matrix and the reference values.

According to the invention, there is also provided a method of recognition and classification of phenomena involving complex waveforms, comprising the steps of detecting a waveform of interest, identifying transitions in said waveform, deriving a matrix of values related to said transitions as a representation of said waveform, and comparing said matrix with stored reference values.

According to the invention, there is further provided a system for processing signals derived from infra-red radiation sources so as to discriminate in favour of flame sources and against other, interfering, sources, comprising means for measuring the changes in magnitude between successive turning points of the signal, comparing means for comparing each such magnitude change with the immediately preceding such magnitude change, and processing means responsive to the successive comparisons to discriminate against those produced when the signal is substantially regularly varying or includes substantially step changes and in favour of those corresponding to a substantially randomly varying signal.

According to the invention, there is yet further provided a method of discriminating in favour of infra-red radiation from flames and against infra-red radiation from interfering sources, comprising the steps of producing signals varying in correspondence with the said radiation, detecting the turning points of the signals, measuring the change in signal magnitude between successive said turning points whereby to produce a series of magnitude change signals, simulating the spatial representation of successive points on a graph having two orthogonal axes each of which is scaled with values increasing from zero for the said magnitude changes with one of the axes representing each currently considered magnitude change and the other of them representing the corresponding im-

mediately preceding magnitude change so that each said point on the graph represents a plot of a particular one of the magnitude changes as compared with the immediately preceding one thereof, whereby points on the graph corresponding to substantially regularly varying said signals lie within a predetermined region extending from the origin and inclined to each said axis, points on the graph corresponding to substantially step changes in the said signals lie within either of two regions extending closely adjacent the respective axes, and points corresponding to substantially randomly varying said signals tend to lie outside all the said regions, and including the step of determining the proportion of the said points which lie outside the said regions whereby to produce an output signal indicating detection of radiation from flames when the said proportion exceeds a predetermined threshold.

Flame detection apparatus embodying the invention will now be described, by way of example only, with reference to the accompanying diagrammatic drawings in which:

Figure 1 is a block diagram of one form of the apparatus;

Figure 2 is a graphical representation of a signal detected in the apparatus of Figure 1;

Figure 3 is a graphical representation of a transition matrix derived from the signal of Figure 2;

Figure 4 is a graphical representation of a signal reversal matrix derived from the signal of Figure 2;

Figure 5 is a block diagram of another form of the apparatus;

Figures 6, 7 and 8 show waveforms and associated graphs for explaining the operation of the apparatus of Figure 5; and

Figure 9 is a schematic flow diagram for explaining the operation of the apparatus of Figure 5.

Referring to Figure 1 a fire detection system comprises a radiation sensor 10 which may suitably be a broad-band detector for visible, infrared or ultraviolet light. The output of sensor 10 is amplified at 12 and passed via an automatic gain control circuit 14 to an A-to-D converter 16. The resulting digitised signal is analysed as will be described by microcomputer 18; if this results in recognition of a fire, an alarm signal of any convenient type is generated at 20.

The output signal from the sensor 10 will be a relatively complex waveform, part of which is shown in Figure 2. The invention is based on deriving from the waveform one or more matrices,

each representing in a simple manner information providing a significant characterisation of the waveform which can then be compared with a reference.

Figure 3 shows a "transition matrix" of the waveform of Figure 2. This is formed by detecting the transitions or the turning points A-J of the waveform and measuring the amplitude of each, in the example shown to a resolution of five amplitude levels. The matrix is then created representing the change in amplitude between successive transitions as a 2-dimensional matrix with axes defining the start and finish amplitudes of that change. For example, between C and D the amplitude changes from 4 units to 0 units, and the step C, D is positioned to define "from 4" (horizontal axis) "to 0" (vertical axis).

The matrix of Figure 3 is thus descriptive of the varying absolute amplitudes of the signal in a time-independent manner. Figure 4 illustrates a "signal reversal" matrix for the same signal, which is descriptive of change (but not absolute value) of amplitude with time. Here again, the matrix is based on detecting signal transitions and their amplitudes, but the elements of the matrix are the amplitude excursion and the time between transitions. Thus, for example, between F and G the excursion (vertical axis) is 4 units and the time (horizontal axis) 5 units.

The matrices may readily be derived from the digitised detected signal by the microcomputer 18, which comprises microprocessor 22, ROM 24, and RAM 26, by appropriate software within the routine competence of a person of ordinary skill in the art.

In use, a given period of sensor signal is digitised and converted into matrix form on a repetitive basis. Each matrix is stored in RAM 26, and the microprocessor 22 then operates to compare the matrix with a reference held in ROM 24. Suitable reference patterns can be developed for loading in ROM 24 by empirical methods, specifically by using a similar sensor and associated equipment to derive matrices from actual fires and actual false-alarm-inducing phenomena. If a predetermined relationship exists between a sensor matrix and a reference matrix, an alarm indication is produced.

Modifications and refinements to the handling of the matrix information may be made, particularly with the use of neural network pattern recognition systems. The two types of matrix described above may each be derived and compared with respective references, and the results of the two comparisons combined to give an overall probability. It is also possible to use auto-correlation, i.e. comparing the sensor signal with a delayed version of itself, to establish the degree of periodicity in the sensor signal as an auxiliary false alarm indication, a high

degree of periodicity being associated with a false alarm situation.

Although described above with specific reference to fire detection, the apparatus may be applied to recognition of other complex variable phenomena, such as explosion detection, transient analysis, and monitoring the condition of machinery.

The form of apparatus shown in Figure 5 includes an infra-red radiation detector 35, such as a pyroelectric detector, which is arranged to view the area 36 in which flames to be detected are expected to arise. The detector 35 may view the area 36 through a suitable radiation filter if required. In a specific example being considered, the detector is arranged to be responsive to infra-red radiation at about 4.3 micrometres, and produces a corresponding electrical signal on a line 38 which is amplified in an amplifier 40 and passed to an analogue to digital converter 42. The resultant digital signal on channel 44, representing the varying radiation produced by the flickering flame, is passed to a processing unit 46 for analysis in the manner to be described. An output line 48 produces a warning signal if the processing unit 46 determines that the signal on line 44 represents a flame. If the processing unit 46 determines that the signal on line 44 represents a non-flame source of infra-red radiation, no warning signal is produced on line 18.

In the manner to be described, the apparatus is able to discriminate against such non-flame sources of varying infra-red radiation as incandescent lamps, moving or vibrating hot surfaces or other sources of infra-red radiation such as sunlight modulated by the passage of a moving body or bodies through its path to the detector.

Figures 6,7 and 8 explain the operation of the apparatus.

Figure 6 illustrates at 6A the waveform (somewhat idealised) of the signal likely to be produced on line 44 (Fig. 5) in response to a regularly varying source of infra-red radiation such as a modulated incandescent lamp. As shown, the waveform 50 is substantially a regular sine wave. In the processing unit 46, each positive and negative peak 50A,50B,50C... is detected, and the processing unit measures the change in magnitude between each peak value and the immediately preceding peak value so as to produce a succession of "magnitude change" signals. These magnitude change signals are represented in Figure 5A by the vertical lines 52A,52B,52C... In view of the regular form of the waveform shown in Figure 6A, each of these magnitude change values will be approximately the same. In the manner to be described in more detail, the processing unit 46 analyses the magnitude change signals by comparing the value

of each one with the previous one.

Figure 6B shows in diagrammatic form the processing carried out. In Figure 6B, the horizontal axis from the origin 0/0 has an arbitrary scale of 0 to 5 and represents the value of each magnitude change signal being considered. The vertical axis downwards from the origin 0/0 is calibrated to the same arbitrary scale and represents the value of the immediately preceding magnitude change signal. Therefore, considering the magnitude change signals 52A and 52B (Figure 6A), point A on Figure 6B represents the comparison between them in graphical fashion; thus, point A represents the point corresponding to the intersection of the value of the magnitude change signal 52B plotted on the horizontal axis and the value of the magnitude change signal 52A plotted on the vertical axis.

The regular nature of the waveform of Figure 6A is such that the corresponding plot on Figure 6B for the comparison of the magnitude change signal 52C with the magnitude change signal 52B will also be at point A. As long as the amplitude of the waveform shown in Figure 6A remains the same, all plots will be at point A. If the amplitude of the waveform is different, but still regular, the plots on Figure 6B will be differently positioned, but will always be on the diagonal line shown chain-dotted at B.

Figure 7A shows the waveform represented by the digital signal on line 44 (Figure 5) for the case where the infra-red radiation being received is from a source which is randomly switched on and off or interrupted. For example, the waveform at region 54 could represent low background radiation. A source of radiation is then suddenly switched on and the level rises to that shown at region 56. This radiation continues and is then abruptly switched off and the detected radiation once more reduces to the background level as shown at region 58. Instead, for example, the radiation in region 56 could be radiation from a hot surface which is interrupted or blocked from the detector over regions 54 and 58.

The waveform shown in Figure 7A is processed in the processor 46 in the same way as described above. The processing unit senses the positive and negative peaks and measures the magnitude change between the successive peaks. The value of each such magnitude change signal is then compared with the immediately preceding one. Figure 7B shows a graph corresponding to that shown in Figure 6B. It will be apparent that, over regions 54, 56 and 58, the signal is fluctuating between peaks whose magnitude difference is very small. Therefore, the corresponding plots on Figure 7B will be clustered around the origin 0/0 - and are not illustrated in Figure 7B. When the waveform undergoes the transition from region 54 to region

56, there will be a large change, shown at 59A, and the corresponding plot is shown at C in Figure 7B. Similarly, there will be a large change, 59B, when the waveform switches from region 56 to region 58, and the corresponding plot is shown at point D. It will therefore be apparent that, with a waveform of the form shown in Figure 7B, the plots on the graph will either be clustered around the origin or will be close to the horizontal or vertical axes.

Figure 8A shows the waveform of the signal on line 44 when the infra-red radiation received is from a flame. As will be apparent, the waveform is significantly random. As before, the processing unit 46 detects each positive and negative peak and measures the value of the magnitude change between each peak and the preceding one and then compares successive values of these magnitude change signals, such as the magnitude change signals shown at 60A, 60B, 60C, 60D.

Figure 8B shows some of the corresponding points on a graph of the same form as that shown in Figures 6B and 7B. Thus, point E is the plot produced by comparing the magnitude change signal 60B with the magnitude change signal 60A. At point F is shown the plot produced by comparing the magnitude change signal 60C with the magnitude change signal 60B. Because of the nature of the waveform of Figure 8A, which varies much more randomly than the waveforms shown in Figures 6A and 7A, the corresponding points on the graph of Figure 8B will tend to be positioned away from the diagonal line B and also away from the horizontal and vertical axes.

The processing unit therefore analyses the incoming waveform on line 44 and, for a fixed number of events where each event consists of a comparison of the value of a magnitude change signal with the value of the immediately preceding magnitude change signal), determines the respective proportions of the number of events which produce (a) plots either on the diagonal B (Figs. 6B, 7B and 8B) or close to the horizontal and vertical axes, and (b) plots which are spaced from the diagonal and from the axes. For example, the analysis could be carried out by assigning a negative "score" e.g. -1) to each event producing a plot on the diagonal B or adjacent to the horizontal and vertical axes, and assigning a positive score (e.g. +1) to each event which produces a plot (corresponding to plots D and F, for example) spaced from the diagonal and spaced from the horizontal and vertical axes. After a predetermined number of events, the negative total is subtracted from the positive total to give a resultant number. A more positive number will indicate that the signal being compared corresponds to radiation from a flame, whereas a more negative number will indicate that the signal corresponds to radiation pro-

duced from an interfering source such as one producing waveform 6A or 7A. Numerical limits can be incorporated into the processing. Thus, for example, processing unit 46 may be arranged to produce a flame warning signal on line 48 only when the number produced by subtracting X from Y is more positive than a fixed threshold.

In practice, of course, sources of interfering radiation of the form shown in Figure 6A will not always produce plots exactly on diagonal B. Therefore, all plots lying within a region whose boundaries lie either side of the diagonal B (as shown by the dotted lines adjacent to the diagonal B) would be considered as representing radiation from interfering sources of the type producing waveform A. Similarly, all points lying within defined regions running parallel to the horizontal and vertical axes would be considered as being derived from interfering radiation of the type producing waveform 7A.

It will be noted that no account is taken of the sign of the magnitude change signals, merely their actual magnitude values.

The program for controlling the processing unit 46 and the thresholds used in the assessment and decision processes may be stored in the ROM 70 (Fig. 5).

The number of events necessary for the processing unit 46 to make a decision can be arranged on a "rolling" basis. For example, the unit 46 can make its decision on the basis of a consideration of the immediately preceding twenty events, each new event occurring then being considered in combination with the immediately preceding nineteen events.

It is also desirable that an assessment be made of the intensity of the radiation so that a warning is only given when (a) the radiation is determined (in the manner described) to originate from a flame and (b) its intensity exceeds a minimum level. The latter may be achieved by adding the magnitude of each magnitude change signal to those of the preceding nineteen on a rolling basis.

Figure 9 shows a flow chart for explaining such processes in more detail.

Block 100 represents the process of reading the data from the analogue to digital converter which may, for example, be carried out by sampling the received digital representation at intervals substantially less than the period of waveforms likely to be received. At block 102, the process checks each sample and compares its magnitude with the previous sample so as to determine whether a turning point has been reached. If it has, the difference from the previous turning point is calculated at block 104 and compared with the previous difference in block 106, a score being assigned according to the notional position of the event on the graph shown in Figs 6 to 8; for

example each event of the type shown in Fig. 8 could be assigned a score of +1 and each event of the type shown in Fig. 6 or Fig. 7 could be assigned a score of -1. In practice, however, better discrimination may be achieved by assigning each event of the type shown in Figure 8 a more positive score such as +10. Block 108 represents the comparison process by which the current score is added to the previous 19 (for example) scores, and the result compared with a threshold. Block 110 represents the summing of the magnitudes of the differences between successive events (the magnitude change signals) and at 112 the magnitude for the current event is summed with the total for the nineteen previous events and the resultant checked to determine whether it exceeds a predetermined minimum. Block 114 represents the production of the fire warning signal if "yes" outputs are produced by both blocks 108 and 112. An alternative method of assessing the magnitude of the radiation is to integrate the digital signal received from the analogue to digital converter over a fixed time period.

The system described above may be used as part of a system for discriminating against interfering sources of radiation. For example, the system shown in Figure 5 could form one channel of a two-channel system. The second channel would be driven by a radiation detector rendered responsive to radiation in a different wavelength band from that of the channel illustrated, such as in another band in which radiation from the flames is expected to lie or another band in which interfering radiation is expected to lie. In the first case, the flame warning signal on line 48 could then be processed in combination with the output of the second channel so as to produce an overall flame warning only when the signal on line 48 is present and when both channels detected flame. In the second case, the signal on line 48 could be produced with the signal from the second channel so that an overall flame warning would only be produced when the signal on line 48 was present and no signal was present from the second channel.

Claims

1. Apparatus for recognition and classification, comprising a sensor (10,35) for detecting a parameter of interest and providing an electrical signal representative thereof, and characterised by calculating means (22,26,36) arranged to derive from said signal at least one matrix (Figs. 3,4,6B,7B,8B) representing transitions of the signal waveform, and means (22,24,46) for comparing the signal matrix with reference values.

2. Apparatus according to claim 1, characteris-

ed in that the calculating and comparing means (22,26,36,24,46) include a micro-computer.

3. A method of recognition and classification of phenomena involving complex waveforms, comprising the step of detecting a waveform of interest, and characterised by the steps of identifying transitions in said waveform, deriving a matrix of values related to said transitions as a representation of said waveform, and comparing said matrix with stored reference values.

4. A method according to claim 3, characterised in that the matrix is a matrix of amplitude excursion between transitions with time between transitions.

5. A method according to claim 3, characterised in that the matrix is a matrix of amplitude at transition with amplitude at next transition.

6. A system for processing signals derived from infra-red radiation sources so as to discriminate in favour of flame sources and against other, interfering sources, characterised by means (46) for measuring the changes in magnitude between successive turning points of the signal, comparing means (46) for comparing each such magnitude change with the immediately preceding such magnitude change, and processing means (46) responsive to the successive comparisons to discriminate against those produced when the signal is substantially regularly varying or includes substantially step changes and in favour of those corresponding to a substantially randomly varying signal.

7. A system according to claim 6, characterised in that the processing means (46) carries out a predetermined number of such comparisons and determines the proportion thereof corresponding to the said regular signals or step changes and the proportion thereof corresponding to the said substantially random signal, and by means (70) for producing a flame warning output when the latter proportion exceeds a predetermined threshold.

8. A system according to claim 6 or 7, characterised by intensity-responsive means (70) for assessing the intensity of the radiation so as to discriminate against radiation whose intensity is lower than a predetermined threshold.

9. A system according to claim 8, characterised in that the intensity-responsive means comprises means for summing the said magnitude changes.

10. A method of discriminating in favour of infra-red radiation from flames and against infra-red radiation from interfering sources, comprising the steps of producing signals varying in correspondence with the said radiation, and characterised by the steps of detecting the turning points of the signals, measuring the change in signal magnitude between successive said turning points whereby to produce a series of magnitude change signals,

simulating the spatial representation of successive points on a graph having two orthogonal axes each of which is scaled with values increasing from zero for the said magnitude changes with one of the axes representing each currently considered magnitude change and the other of them representing the corresponding immediately preceding magnitude change so that each said point on the graph represents a plot of a particular one of the magnitude changes as compared with the immediately preceding one thereof, whereby points on the graph corresponding to substantially regularly varying said signals lie within a predetermined region extending from the origin and inclined to each said axis, points on the graph corresponding to substantially step changes in the said signals lie within either of two regions extending closely adjacent the respective axes, and points corresponding to substantially randomly varying said signals tend to lie outside all the said regions, and including the step of determining the proportion of the said points which lie outside the said regions whereby to produce an output signal indicating detection of radiation from flames when the said proportion exceeds a predetermined threshold.

11. A method according to claim 10, characterised by the step of blocking the production of the said output signal unless, for a predetermined number of the said points, the sum of the corresponding magnitude changes exceeds a predetermined value.

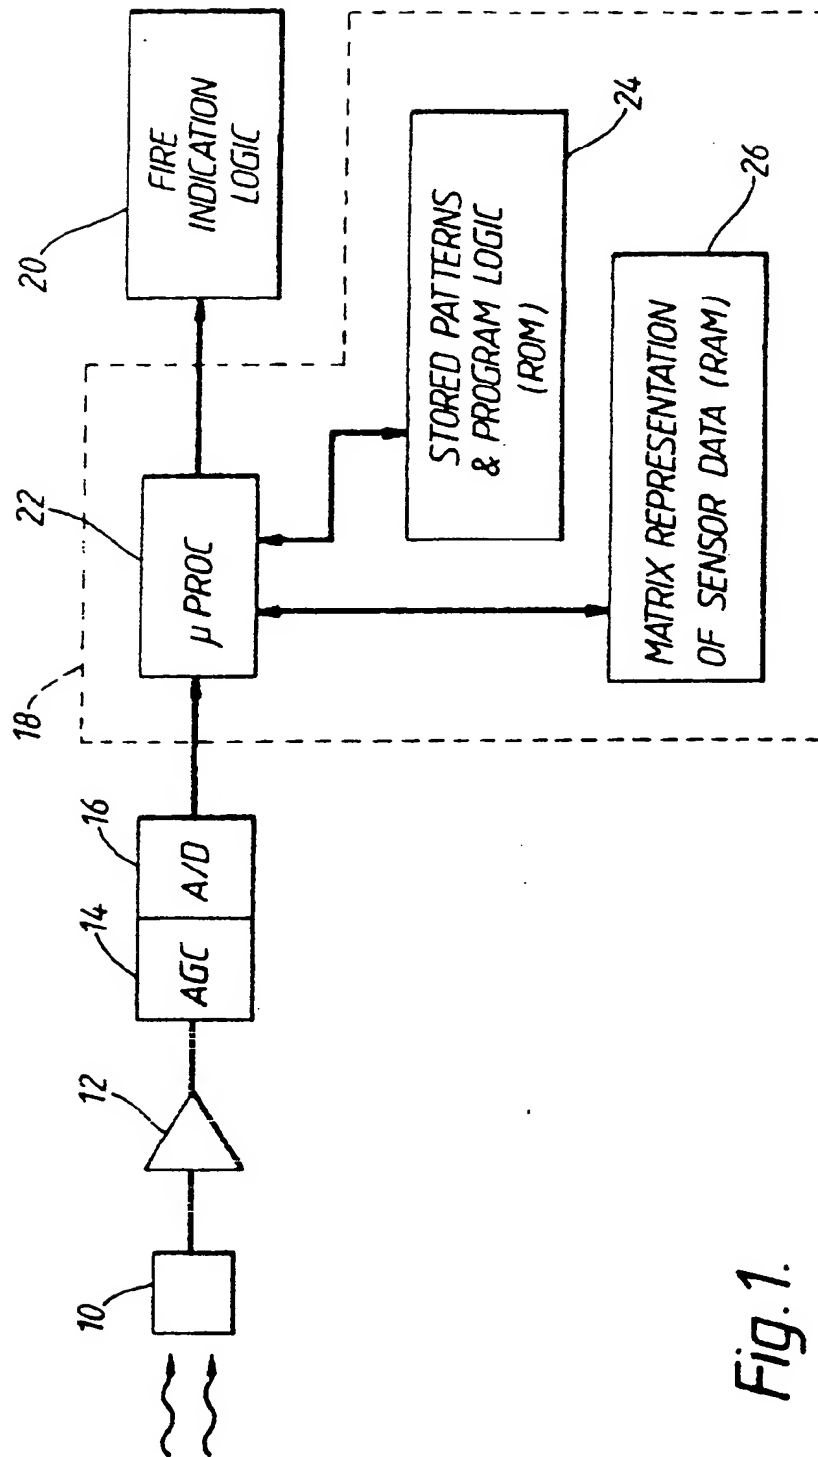


Fig. 1.

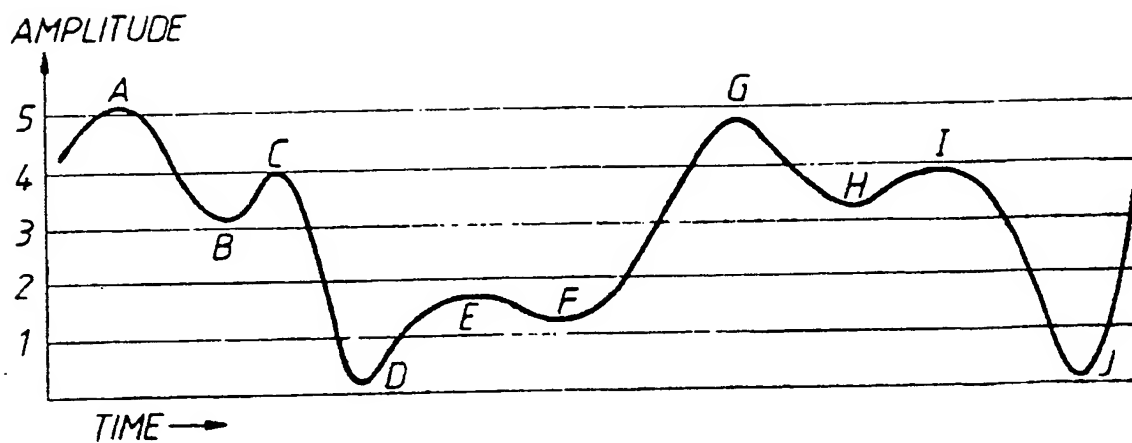


Fig. 2.

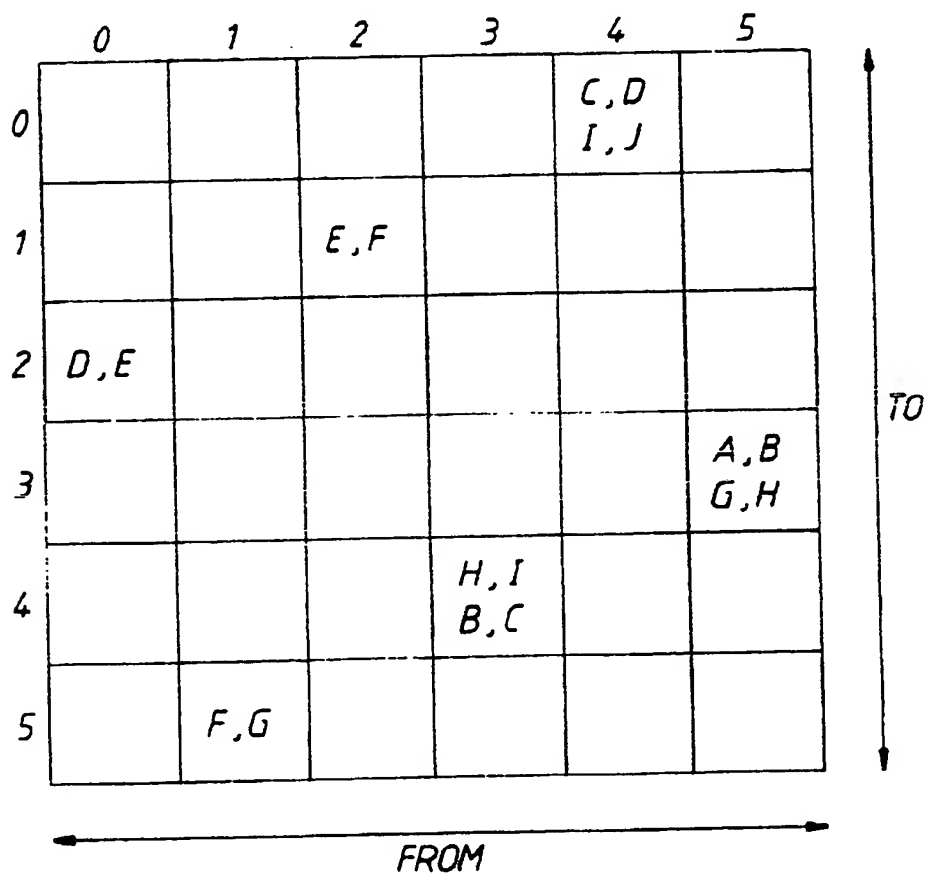


Fig. 3.

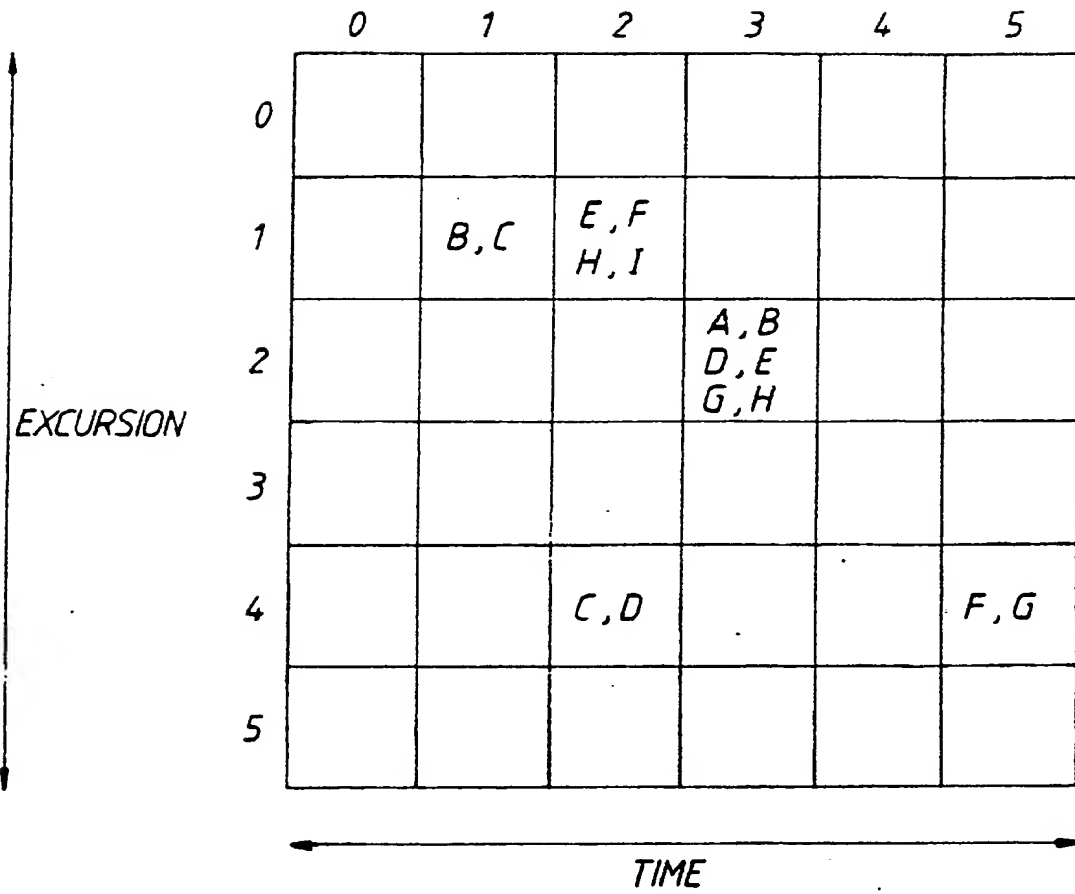
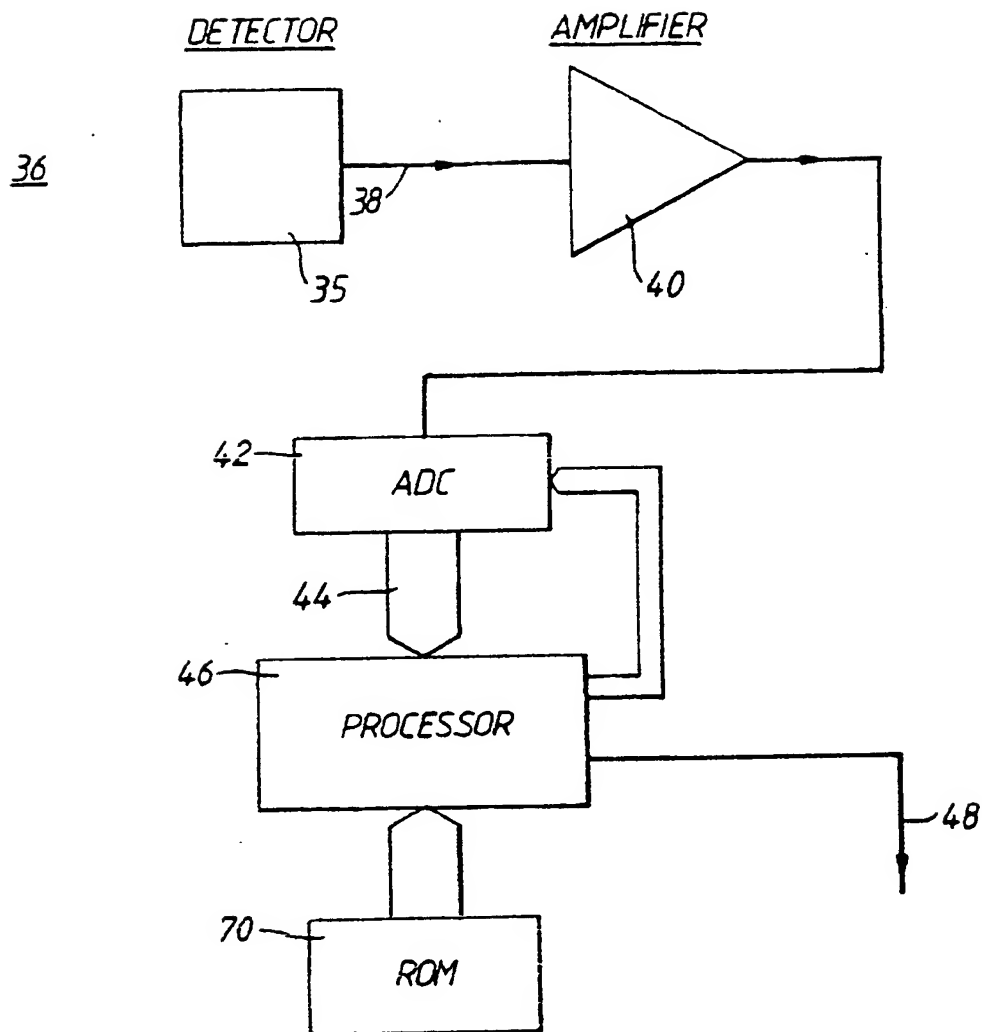


Fig. 4.

*Fig. 5.*

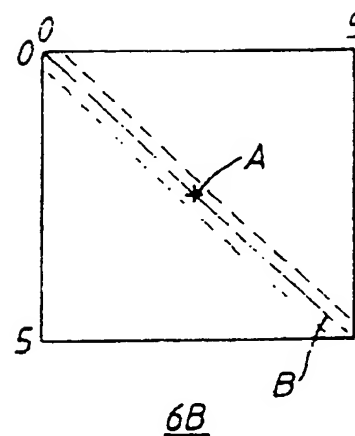
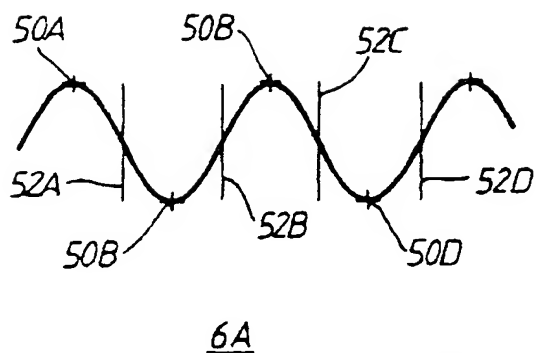


Fig. 6.

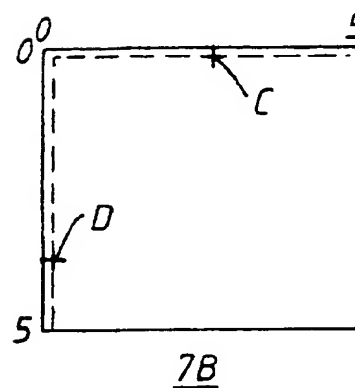
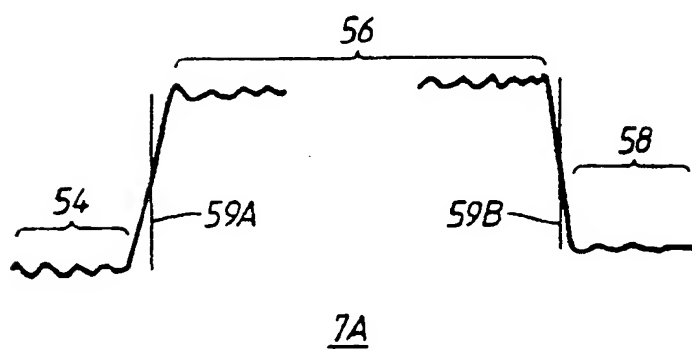


Fig. 7.

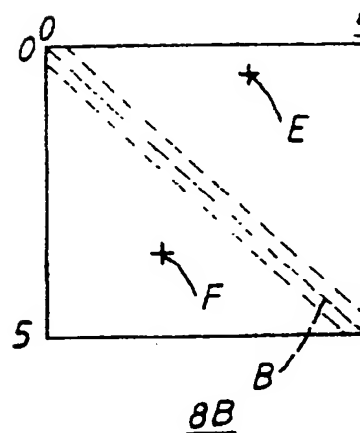
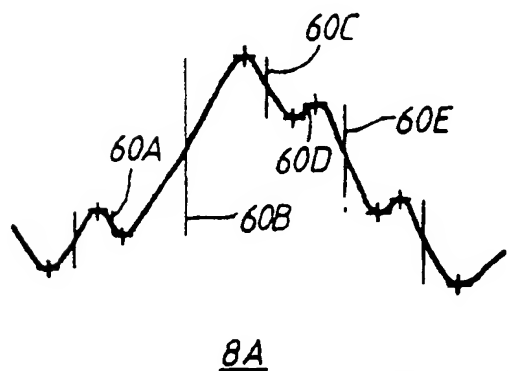


Fig. 8.


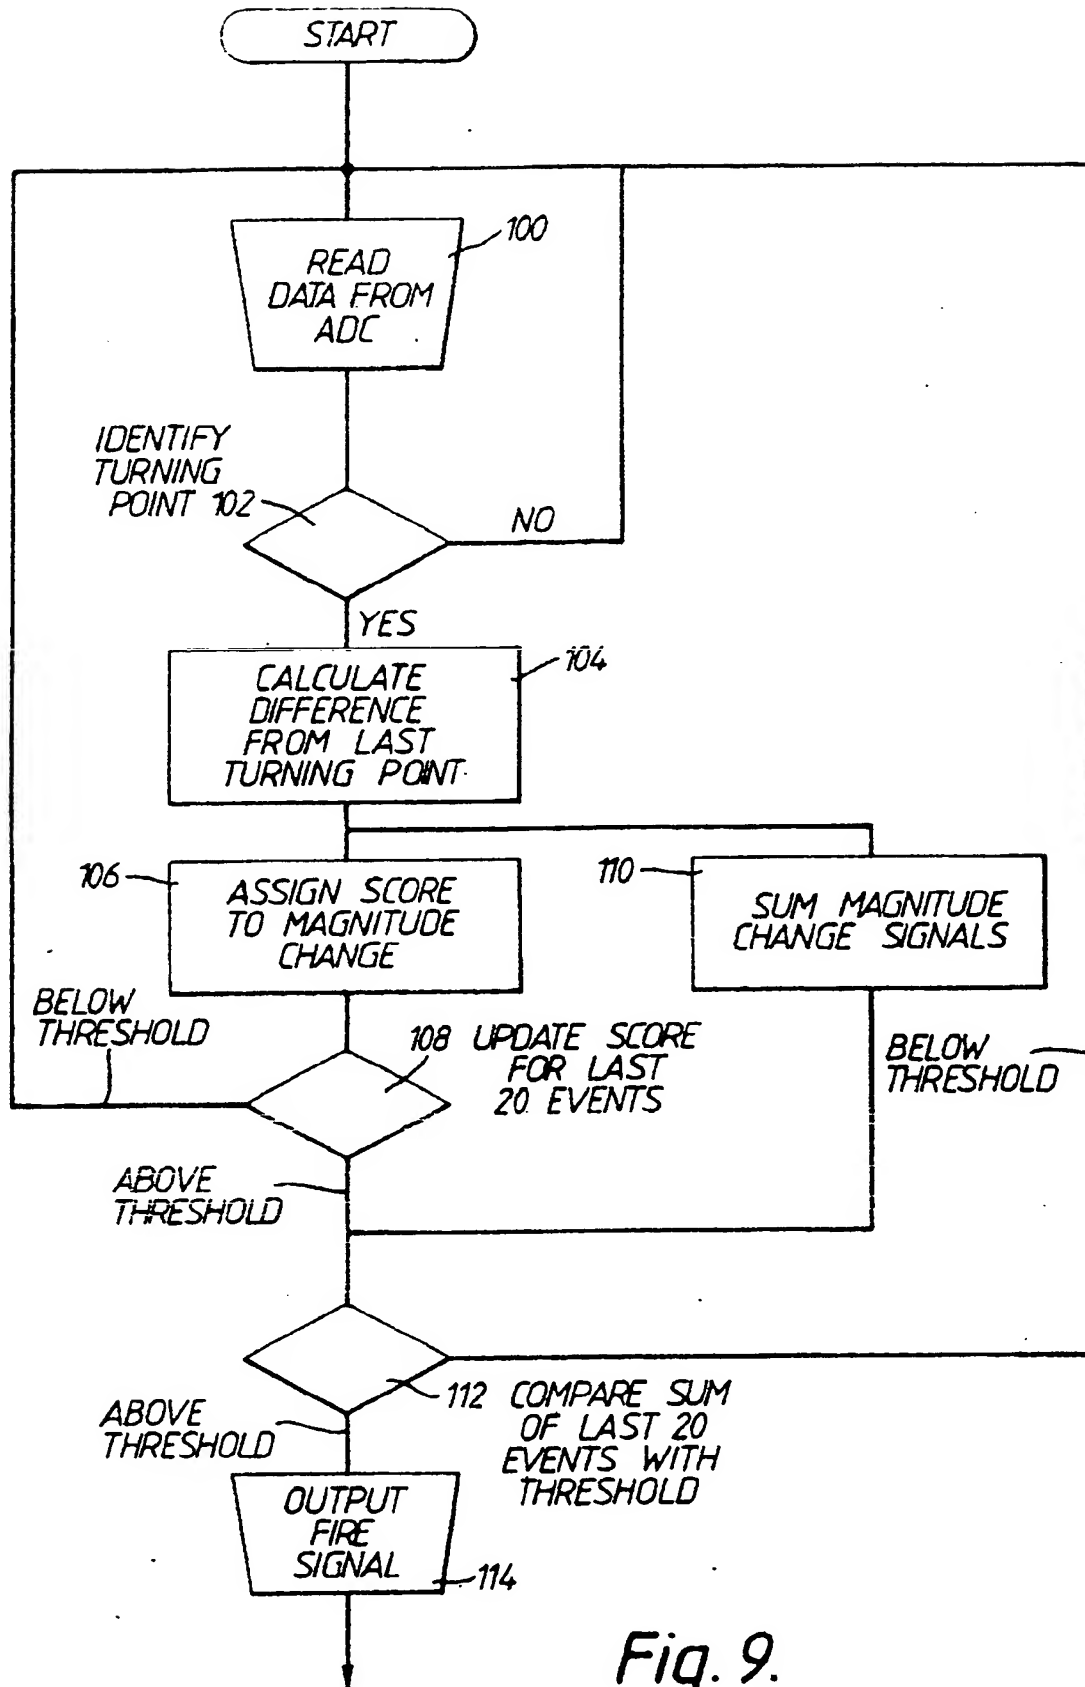


Fig. 9.



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number:

0 366 298 A3

(12)

EUROPEAN PATENT APPLICATION

(21) Application number: 89310333.3

(51) Int. Cl.⁵: **G06K 9/46**, G08B 17/00,
G06F 15/70, G01R 23/16

(22) Date of filing: 10.10.89

(30) Priority: 12.10.88 GB 8823947
02.12.88 GB 8828166

(43) Date of publication of application:
02.05.90 Bulletin 90/18

(84) Designated Contracting States:
CH DE FR IT LI

(88) Date of deferred publication of the search report:
10.06.92 Bulletin 92/24

(71) Applicant: **DETECTOR ELECTRONICS
CORPORATION**

6901 West 110th Street
Minneapolis Minnesota 55438(US)

(72) Inventor: **Powell, Brian David**
22 Loosen Drive
Maidenhead, Berkshire, SL6 3UR(GB)
Inventor: **Davidson, Ian**
Rose Villa
Lumphanan, Aberdeenshire, AB3 4PX(GB)

(74) Representative: **Foster, David Martyn et al**
MATHISEN MACARA & CO. The Coach
House 6-8 Swakeleys Road
Ickenham Uxbridge UB10 8BZ(GB)

(54) Recognition and processing of wave forms.

(57) A flame detector has a sensor for producing a digital waveform (8A) representing the flickering flame. Its turning points are detected and the magnitudes 60A, 60B, 60C... between successive such points are measured. The value of each such magnitude is plotted on a graph (8B) whose horizontal axis represents the current value and whose vertical axis represents the immediately preceding value. Points such as E and F are produced lying in

regions away from the diagonal B and from the axes. If the detected waveform originates from a regularly varying interfering source, the corresponding points will lie on or near the diagonal B. If the interfering source is a waveform undergoing step changes, the corresponding points will lie adjacent to the axes. In this way, discrimination between flames and interfering sources of radiation can be made.





Fig. 8.

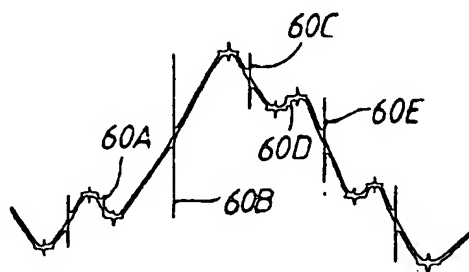

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number

EP 89 31 0333

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int. Cl.5)
6	X US-A-4 495 585 (BUCKLEY) * Abstract; figure 1 * ---	1-3,5	G 06 K 9/46 G 08 B 17/00 G 06 F 15/70 G 01 R 23/16
6	A US-A-4 152 642 (DOHERTY) * Column 3, lines 18-25; figures 1,2 * ---	4	
	A US-A-4 495 585 ---	10	
3	A DE-A-3 421 782 (M.PISTOR) * Abstract * -----	10	
The present search report has been drawn up for all claims.			TECHNICAL FIELDS SEARCHED (Int. Cl.5)
			G 08 B G 01 R
Place of search		Date of completion of the search	Examiner
THE HAGUE		15-11-1991	SONIUS M.E.
CATEGORY OF CITED DOCUMENTS			
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			
T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ----- & : member of the same patent family, corresponding document			

EPO FORM 1503 03.82 (P0401)



CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ All claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claims:
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

See Sheet B.

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:
- ☒ None of the further search fees has been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims,

namely claims: 1-5, 10, 11



European Patent
Office

EP 89 31 0333-B-

LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims 1-5,10,11: Signal analysis by mapping signal transition values into a two-dimensional matrix.
2. Claims 6-9: Signal analysis by comparing successive transition values, not necessarily involving a two-dimensional mapping.